REVERSIBLE SYNCHRONOUS MOTOR

AS-10

10 kg-cm at 60 RPM. Low speed, instant start-stop, high torque.

ALL-STEP **FINE-STEP**

BY ALLIED MARKETING

Electrical and performance


TORQUE	10 kg-cm
SPEED	60 RPM
SUPPLY	Single phase 220/230 V, 50 Hz
LINE CURRENT	< 200 mA
POWER	35 W
DIRECTION	Reversible, instant start-stop
STOPPING	Within 5°
SYNCHRONISM	Within 3.6° between two motors

Mechanical and matched parts

DIMENSIONS	Available on request
WEIGHT	Available on request
SHAFT	Available on request
MOUNTING	Available on request
CAPACITOR C	Available on request
RESISTOR R	Available on request

Ask for drawings and the matched capacitor and resistor at **www.allied-marketing.co/contact**.

Wiring

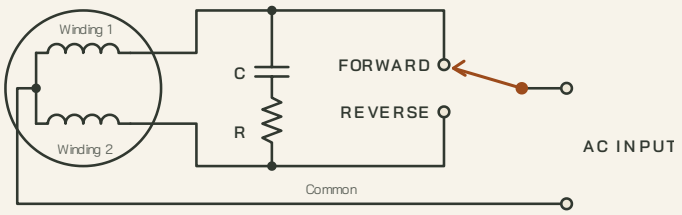

Two windings with a common lead. Capacitor C and resistor R sit in series between the two winding leads. The switch on the AC input selects forward or reverse.

FINE-STEP and ALL-STEP share this specification, the same test before dispatch and this datasheet. Order the name on your approved parts list.