REVERSIBLE SYNCHRONOUS MOTOR

# AS-40

**40 kg-cm at 60 RPM. Low speed, instant start-stop, high torque.**

ALL-STEP FINE-STEP

BY ALLIED MARKETING

## Electrical and performance


| | |
|---|---|
| TORQUE | 40 kg-cm |
| SPEED | 60 RPM |
| SUPPLY | Single phase 220/230 V, 50 Hz |
| LINE CURRENT | < 500 mA |
| POWER | 120 W |
| DIRECTION | Reversible, instant start-stop |
| STOPPING | Within 5° |
| SYNCHRONISM | Within 3.6° between two motors |

## Mechanical and matched parts

| | |
|---|---|
| DIMENSIONS | Available on request |
| WEIGHT | Available on request |
| SHAFT | Available on request |
| MOUNTING | Available on request |
| CAPACITOR C | Available on request |
| RESISTOR R | Available on request |

Ask for drawings and the matched capacitor and resistor at www.allied-marketing.co/contact.

## Wiring

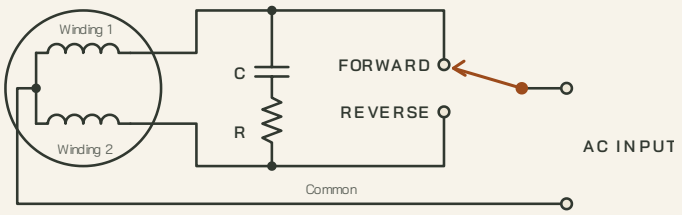


Two windings with a common lead. Capacitor C and resistor R sit in series between the two winding leads. The switch on the AC input selects forward or reverse.

FINE-STEP and ALL-STEP share this specification, the same test before dispatch and this datasheet. Order the name on your approved parts list.